



HARDWARE/STAGING/RIGGING



HARDWARE/STAGING/RIGGING

- **STAGE DECK**

200x100 cm with telescopic legs 60 – 100 cm.

Max load 500 kg/sqm

Available heights 30 cm, 120 cm, 150 cm





TRUSS SYSTEM

➤ **Litec QX30SA truss system 290x290**

Square section aluminum truss twist-resistant version with 29 cm long sides.

Chords A: extruded tube Ø 50 x 2 mm EN AW 6082 T6

Diagonals B: extruded tube Ø 18 x 2 mm EN AW 6082 T6

Ends C: aluminum casting plate EN AC 42200 T6

Connection systems QXFC: quick-fit kit; QXSM10: bolt connection kit



➤ **Kinvee truss system 300x300**

Square section aluminum truss twist-resistant version with 30 cm long sides.

Chords A: extruded tube Ø 50 x 3 mm EN AW 6082 T6

Diagonals B: extruded tube Ø 20 x 3 mm EN AW 6082 T6

Connection systems QXFC: quick-fit kit; QXSM10: bolt connection kit






➤ **Kinvee truss system 400x400 cm**

Square section aluminum truss twist-resistant version with 40 cm long sides.

Chords A: extruded tube Ø 50 x 3 mm EN AW 6082 T6


Diagonals B: extruded tube Ø 20 x 3 mm EN AW 6082 T6

Connection systems QXFC: quick-fit kit; QXSM10: bolt connection kit

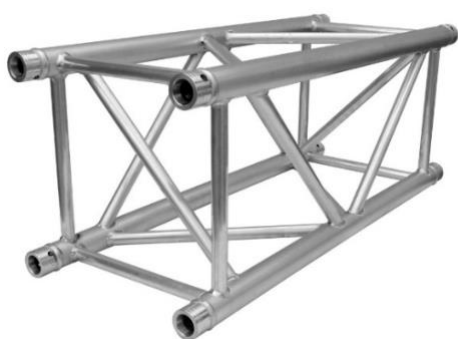

• **ELECTRIC MOTOR HOISTS**

Chain master and Verlinde 250 kg, 500 kg, 1000 kg chain motor hoists

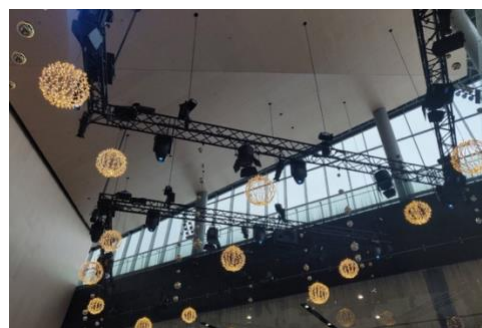



HARDWARE/STAGING/RIGGING